


## TECHNICAL SPECIFICATION

# PL12

### CONSTRUCTION

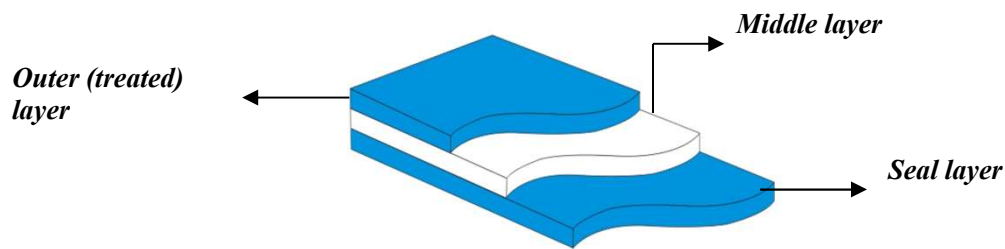

### FEATURES AND APPLICATIONS

- Paper-like film.
- One or two sides corona treated.
- Could be used where paper feeling wanted instead of paper.

### CERTIFICATION

Films comply with the requirements "COMMISSION REGULATION (EU) No 10/2011 on plastic materials and articles intended to come into contact with food". All films are produced in ISO 9001, ISO14001 certified facilities and have been approved by the British Retail Consortium (BRC).

### PRODUCT and FOOD SAFETY

For more information please request Material Safety Data Sheet (MSDS) and Food Contact Declaration.

### SHELF LIFE and STORAGE

The shelf life of the product is 6 months after production if it is stored in dry conditions, away from exposure to direct sunlight and at normal room conditions.

PROPERTIES							
Parameter	Unit		Value			Test Method	
Thickness	micron		28	40	50	BAREKS TEST	
	gauge		112	160	200	BAREKS TEST	
Density	g/cm <sup>3</sup>		1,295	1,286	1,278	BAREKS TEST	
Yield	m <sup>2</sup> /kg		27,58	19,44	15,65	BAREKS TEST	
CoF	ln / ln		≤ 0,5			ASTM D1894	
Tensile Strength	MD	N /25 mm	± 6	15	20	22	ASTM D882
	TD		± 6	10	13	16	
Elongation at Break	MD	mm	± 100	60	85	105	ASTM D882
	TD		± 5	5	5,4	6	

The above information is the result of laboratory tests, which are applied on samples from standard production. Since the varying conditions under which our products used are beyond our control, all of the above results are without guarantee and warranty. Users are advised to conduct their own testing of our products to determine suitability for use alone or in combination with other products.