


TECHNICAL SPECIFICATION

ML26WE

CONSTRUCTION

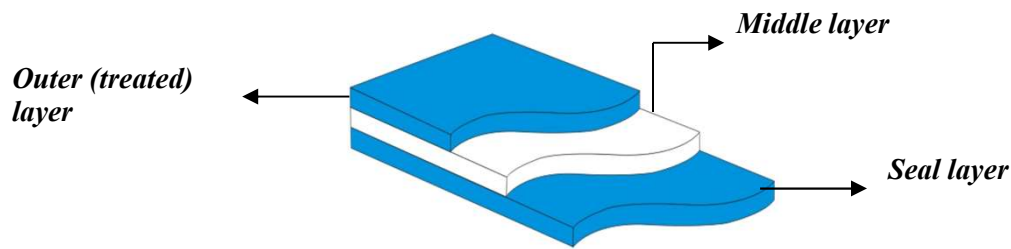

FEATURES AND APPLICATIONS

- Suitable for both HFFS and VFFS machines
- Suitable for PET, OPP, PVC, Metallized PET, Al, OPA and paper lamination.
- Suitable for pet food, powdered food and detergent packaging.
- Improved tear and puncture resistance
- Improved Hot-tack properties
- White pigmented extra opaque film

CERTIFICATION

Films comply with the requirements "COMMISSION REGULATION (EU) No 10/2011 on plastic materials and articles intended to come into contact with food". All films are produced in ISO 9001, ISO14001 certified facilities and have been approved by the British Retail Consortium (BRC).

PRODUCT and FOOD SAFETY

For more information please request Material Safety Data Sheet (MSDS) and Food Contact Declaration.

SHELF LIFE and STORAGE

The shelf life of the product is 6 months after production if it is stored in dry conditions, away from exposure to direct sunlight and at normal room conditions.

PROPERTIES				
Parameter	Unit		Value	Test Method
Thickness	micron		100	BAREKS TEST
	gauge		400	
Density	g/cm ³		0,959	BAREKS TEST
Yield	m ² /kg		10,43	BAREKS TEST
CoF	ln / ln		0,25 - 0,40	ASTM D1894
Tensile Strength	MD	N /25 mm	± 6	ASTM D882
	TD		± 6	
Elongation at Break	MD	mm	± 100	ASTM D882
	TD		± 100	
Seal Strength / Elongation	3 bar 130°C 0,8 sn	N /25 mm	± 3	BAREKS TEST
		mm	± 50	
Opacity	%		± 5	BAREKS TEST

The above information is the result of laboratory tests, which are applied on samples from standard production. Since the varying conditions under which our products used are beyond our control, all of the above results are without guarantee and warranty. Users are advised to conduct their own testing of our products to determine suitability for use alone or in combination with other products.